



---

# Voxengo Primary User Guide

(for VST, AudioUnit audio plug-ins made by Voxengo)

<http://www.voxengo.com/>

Document revision date: 02-Dec-2008

## **Contents**

### Introduction 4

#### Common Features of Voxengo Audio Plug-Ins 4

### User Interface Layout 5

#### Title Bar 5

#### Control Buttons 5

#### Plug-In Control Interface 5

#### Hint Line 5

### Main Control Buttons 6

#### Plug-In Instance Name Edit Box 6

#### Oversampling Selector 6

#### Bypass Switch 7

#### A/B Switch Button 7

#### Copy Button 7

#### Reset Button 7

### Standard Controls 8

#### Knob 8

#### Keyboard Value Entry 8

#### Sliders 9

### Undo/Redo 10

### Preset Manager 11

#### Main Preset Manager 11

#### Local Preset Managers 12

### Channel Routing Window 13

#### Layout 13

#### Input and Output Routing Selection 13

#### Mid-Side Pairs Selection 13

#### Channel Group Assignments 14

#### Key Signal Sources 14

#### In Channel Labels 14

#### Group Names 15

Routing Presets	15
Channel Group Selector	16
Channel Group List	16
Plug-In Settings for a Specific Plug-In	17
Color Scheme	17
User Interface Scale	17
Hide Hints	17
Global Voxengo Plug-In Settings	18
Auto Oversampling Level	18
Mouse Wheel Precision	18
Shift Key Precision	18
Drag Precision	18
Show Knob Labels	18
Tablet Mode	18
Show Virtual Keyboard	18
VST Built-In Refresh	19
Plug-In Files' Locations	20
Additional Information	21
Selecting Best Audio Block Size	21
64-Bit Audio Processing	21
Plug-In Registration	21
CPU Load Notice	21
Questions and Answers	22

## Introduction

---

Voxengo audio plug-ins feature a set of standard interface elements that are shared among all Voxengo plug-ins.

This guide describes functionality of these elements, focusing on the interaction between the user and the plug-in. This means that this guide does not describe an actual application of user interface elements (some may control Gain, some may control Frequency, etc.), but shows the ways of using these elements efficiently from the user perspective. After reading this guide you will be able to use common features of all Voxengo audio plug-ins. Any non-standard or special features are described in the guides for the plug-ins that contain these non-standard or special features, and are not covered by this guide.

Beside user interface description this guide contains important technical information about Voxengo plug-ins.

### Common Features of Voxengo Audio Plug-Ins

---

- Preset manager
- A/B comparison switch
- Internal channel routing
- Mid/side processing
- Undo/redo history
- Input channel naming
- Channel grouping
- Channel group naming
- Settings (coloration, scale, hints)
- Global settings (control precision, etc.)
- Plug-in instance naming
- Oversampling
- Bypass switch
- External side-chain (where applicable)
- Contextual hint messages

## User Interface Layout

---

The graphical interface of every Voxengo plug-in consists of four distinctive parts: the title bar, the control buttons array, the plug-in control interface and the hint line.

### Title Bar

---



The title bar shows plug-in's version, plug-in's title, and also contains the Plug-In Instance Name text box, the Oversampling selector and the "Bypass" switch.

### Control Buttons

---



This part of the user interface contains several control buttons: the "Presets" button which opens the preset manager popup window; the quick preset selector button which is displayed on top of the "Presets" button; three change history-related buttons; the A/B comparison button; the "Copy" button; the "Reset" button; the "Routing" button which opens the channel routing popup window; the quick routing preset selector which is displayed on top of the "Routing" button; and the "Settings" button which opens a popup window with the plug-in's copyright information and additional settings.

### Plug-In Control Interface

---

This part of the plug-in varies greatly from plug-in to plug-in, and an in-depth description is available on a per plug-in basis, in a separate user guide.

### Hint Line

---




This interface element displays hint messages and may also display other informational messages. The hint line can be disabled in the "Settings" window.

## Main Control Buttons

---

Every Voxengo plug-in features a set of standard control buttons. They are shown and described below.



### Plug-In Instance Name Edit Box

---

This control element allows you to give a name to the current plug-in instance. This name is used for informative purposes only: it helps you to remember the purpose of the plug-in, or gives you a note of a name of the host audio channel the plug-in is inserted to. For example, the instance name can be set to “Vocals”, “Drum Bus”, “Polysynth”, “Bass”, “Lead Guitar”, etc.

### Oversampling Selector

---

This selector allows you to select a “quality factor” for the plug-in. An oversampling allows a plug-in to run on a higher internal sample rate thus offering a better overall sound quality. Almost all types of audio processes benefit from an oversampling: probably, only gain adjustment, panning and convolution plug-ins have no real use for it. An oversampling helps plug-ins to create more precise filters with minimized warping at highest frequencies, to reduce spectral aliasing artifacts in compressors and saturators, to improve a level detection precision in peak compressors. The higher the oversampling setting is, the more CPU resources plug-in will require since a CPU load is increased proportionally to the specified oversampling setting: at the “8x” oversampling setting plug-in uses exactly 8 times more CPU time (and that is excluding the time necessary to perform the oversampling itself).

The “Auto” oversampling option is the special option that enables the oversampling when a project is being bounced (exported) to a wave file; in this mode, when the plug-in works in the real-time mode the oversampling is set to the “1x” (disabled) option. It should be noted that not all audio host applications provide the plug-in with the required plug-in state information: in those cases the “Auto” option works as the “1x” option all the time (this is the case for some older Mac OS X audio applications that do not report the off-line bouncing state to the plug-in). The “Auto” oversampling mode engages the “4x” oversampling mode if the working sample rate is below 72 kHz; the “2x” mode is engaged if the sample rate is below 144 kHz; otherwise the oversampling is not engaged at all (for example, if the working sample rate is equal to 176.4 kHz or 192 kHz the oversampling is not engaged). The maximum oversampling level used when the “Auto” mode is engaged can be adjusted in the global settings window.

If not specified otherwise, Voxengo plug-ins are using poly-phase IIR low-pass filters with at least 106 dB stop-band attenuation and 6% transition band width (which starts at  $F_s/2$ ) for the oversampling. Please note that these poly-phase filters impose a phase coloration which sounds slightly different on various working sample rates.

## Bypass Switch

---

The Bypass switch was mainly designed for evaluation of changes the plug-in made. The Bypass switch will not reduce the plug-in's CPU load when switched on. The Bypass state is not saved between project sessions, and is not restored to its previously enabled state when the project is reloaded. This was done so to reduce a possible frustration due to the Bypass switch left enabled by a mistake.

## A/B Switch Button

---

By pressing the “A/B” switch button, you can switch between the current and the shadow (or, alternatively, the “A” and the “B”) plug-in states.

Since only a single “shadow” state is used in the plug-in, you can use the “A/B” switch button to copy programs between the Session Bank's slots. To do so, you first need to switch to a program you want to copy and then press the “Copy” button. Next, switch to a program where you want to put the first program and then finally press the “A/B” switch button again. (The preset manager and its preset banks are discussed later in this guide.)

## Copy Button

---

The “Copy” button copies the current plug-in state to the “shadow” one. You may then switch to this “shadow” state by pressing the “A/B” button.

## Reset Button

---

This is the master reset button. By pressing this button you will reset the plug-in to its default state. The default state can be chosen in the Preset Manager window.

## Standard Controls

---

### Knob

---



The knob control consists of four parts: the name of parameter it controls, the knob position marker, the center of the knob, and the parameter value readout.

The knob position marker is represented by a rounded light indicator. You may drag this marker to adjust the value of the parameter using the circular knob adjustment approach: during dragging, you may move the mouse cursor farther away from the knob to increase parameter value adjustment precision. You may click on the marker to set the desired parameter value immediately.

The center of the knob has a defined color that corresponds to the parameter or parameter group the knob controls. You may drag the center of the knob to adjust the value of the parameter with up and down mouse movements, linearly. While dragging the center of the knob with the left mouse button, by additionally pressing the right mouse button you can enable a high precision adjustment mode (which can otherwise be enabled by holding down the “Shift” key).

The parameter value readout displays the current value of the parameter. This readout can be dragged the same way as the center of the knob can be dragged.

Dragging precision can be adjusted in the global settings window.

When knob is hovered with the mouse cursor, a scale ring is displayed that shows parameter values at different knob positions (“knob labels”). This ring can be disabled in the global settings window.

You may additionally use the right mouse button to enable direct knob linking. The linking between knobs is available when two given knobs are logically linked (for example, input and output gain knobs, low and high frequency knobs, etc.). You may hold the “Ctrl” key before dragging a knob with the right mouse button to enable inverse knob linking: in this mode every positive increment of the knob you drag results in a negative increment in the linked knob.

Knob can be also controlled with the mouse wheel. Double-clicking on the knob resets it to the default state.

### Keyboard Value Entry

---

Most read-out values displayed on the user interface (gain, frequency, parameter value read-outs) can be double-clicked for keyboard value entry.



## Sliders

---



Voxengo plug-ins feature horizontal and vertical sliders. A slider can be dragged with the left mouse button to perform adjustments. While dragging the slider with the left mouse button, by additionally pressing the right mouse button you can enable a high precision adjustment mode (which can otherwise be enabled by holding down the “Shift” key).

If plug-in presents you an array of sliders (like the “Overtone GEQ” plug-in does) by holding down the right mouse button on the slider array you will engage the “drawing” mode that allows you to position sliders in the “free-hand” mode.

## Undo/Redo

---

Voxengo plug-ins offer a convenient way of managing changes you apply to the plug-in's state. When you apply a change to any control, its previous and new values are stored in the special "change log" which you can then use to "unwind" and "rewind" any previously made changes. This way you can be sure that no single unwanted or occasional change you do affects the state of the plug-in in a wrong way.

Undo/redo control consists of three buttons: the "Undo", the "History" and the "Redo":



The "Undo" button allows you to un-do changes made to the plug-in's state.

The "History" button opens change log (history) that lists all changes made to the plug-in's state in the order you have made these changes before. You can re-do and un-do changes to any level of depth, instantly. Change log keeps track of last 32 changes you have made. Note that a parameter change is logged with group name placed in parentheses (e.g. "Gain (Ls) change").

The "Redo" button allows you to re-do changes that were already un-done via the "History" or "Undo" buttons.


## Preset Manager

---

### Main Preset Manager

---

Every Voxengo audio plug-in features the main preset manager which you can use to store plug-in state presets you define.

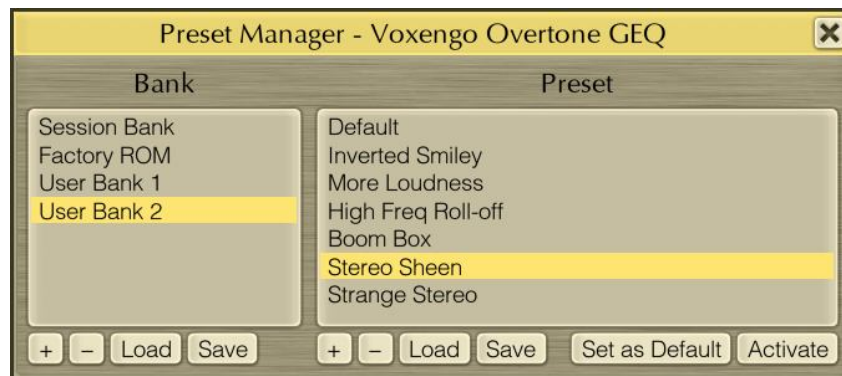

Presets in the main preset manager are shared among all instances of the same Voxengo plug-in. All presets within the main preset manager are stored in user preset banks. Beside user preset banks two special banks exist: the “Session Bank” and the “Factory ROM” bank. The “Session Bank” lists presets that “mirror” programs of the host audio application. When you are activating a preset in the “Session Bank” you are actually switching a current program in the audio host application: a currently selected program is specified by the “right allow” symbol. The “Factory ROM” bank lists presets that were pre-programmed by the plug-in's producer. These presets cannot be changed, but can be activated. The “Factory ROM” bank is also loaded into the “Session Bank” every time a new instance of the plug-in is created in the audio host application.

The main preset manager contains the following control buttons:

The “+”, “-”, “Load” and “Save” buttons allow you to add and remove the bank or preset, and load and save the bank or preset to and from a disk file. Right-clicking the “+” button inserts preset into the current list position rather than to the end of the list (when the left mouse button is used).

Please note that Voxengo plug-ins use a proprietary format to store presets and preset banks. We suggest that you add a comprehensive name prefix to bank and preset files so that you would not mix up presets created in different Voxengo plug-ins. During a save operation, the plug-in will offer you a default name prefix automatically. Voxengo plug-in preset files possess the “.cpf” file extension while preset bank files possess the “.cbf” file extension.

The “Set as Default” button allows you to designate a selected preset to become the default preset. The default preset is loaded every time a new plug-in instance is created in the audio host application, or the master “Reset” button is pressed. If you want to restore the original default preset you should press the “Set as Default” button on the “Default” preset in the “Factory ROM” preset bank.

Double-clicking on a preset name loads the specified preset state. The same does the “Activate” button. A preset loading cannot be undone.

To change a name of the preset or bank you should at first select the required item and then after a small delay click the item again. Please do not mix this operation with a double-click which activates a selected preset.

## Local Preset Managers

---

Voxengo plug-ins also feature so called “local” preset managers: for example, the one available in the Channel Routing window. These preset managers do not possess preset banks, and are not related to the main preset manager: they work independently from the main preset manager.



Presets in this preset manager are globally accessible to Voxengo plug-ins of all kinds. These presets greatly minimize routine adjustments you usually need to perform after creating a new plug-in instance in your audio host application.

## Channel Routing Window

---

### Layout

---

The Channel Routing window consists of a set of selection buttons assembled in the following groups: the “Input Routing”, the “Mid-Side Pairs”, the “Group Assignments”, the “Key Signal Sources” and the “Output Routing”:



### Input and Output Routing Selection

---

These groups of buttons allow you to route external plug-in inputs to internal plug-in channels and vice versa: to route internal plug-in channels to external plug-in outputs. A plug-in has a pre-defined number of internal channels while a number of input and output channels may vary depending on the host audio application track or bus where the plug-in resides. Note that if input routing selector appears red, it means that this selector refers to a non-existent input channel: you may correct this warning by selecting an existing channel. External side-chain inputs are denoted by parenthesized labels: for example, “(IN3)”, “(IN4)”.

### Mid-Side Pairs Selection

---

These buttons (if available in a particular plug-in) allow you to assign internal channels to mid-side encoding/decoding pairs. The mid-side encoding is a wide-spread technique that allows you to process stereo signal’s middle (center) and side (spatial) information independently of each other thus offering a great deal of control over that signal’s stereophony. Mid-side encoding works with paired channels only and thus requires two channels to be assigned to the same mid-side pair. An input signal is mid-side encoded before it is processed by the plug-in, and decoded afterwards before it is routed to an output of the plug-in.

## Channel Group Assignments

---

The plug-in allows you to assign its internal audio channels to logical groups of channels. Each group of channels is affected by its own set of parameter values (it can be an EQ shape, a gain factor, an overdrive setting, etc.)

Individual audio channels can be attached to channel groups. For example, this allows you to have individual EQ settings for channel 1 and for channel 2, separately. To achieve this you may simply assign channel 1 to group 1, and channel 2 to group 2.

In a surround setup you may assign left and right channels to group 1, and surround channels to group 2, and apply an EQ shape to them independently from each other.

Each plug-in audio channel can be assigned to a single channel group only. Channel grouping also affects channel-linking in case of dynamics processing and other processes that estimate signal loudness envelope: channels assigned to the same group will be linked during processing and signal loudness estimation. The mode of such linking (max of all, average of all, etc.) may be specified with an additional plug-in control, if available.

## Key Signal Sources

---

This set of buttons (if available in a particular plug-in) allows you to assign key signal sources to all internal channels. For example, instead of using channel's "A" self signal to trigger processing performed on this channel you may assign channel "B" to trigger processing performed on the channel "A". Key signal sources are usually used in dynamics processing plug-ins. The technique when any particular channel is used as a "key" for another channel is called ducking: "key" channel "ducks" another channel. E.g. bass guitar track may be "ducked" by a drum track if necessary.

If some internal channel is only used as key signal source (e.g. this channel is an external side-chain signal), this channel can be "muted": in such case this channel will not be processed and sent to the output together with channels that were not muted. Such "muted" channel will be available to plug-in's internal algorithms only.

Please note that external side-chain sources are always represented by individual input channels in the plug-in. While audio applications that support AudioUnits usually offer a convenient one-click "side-chain" input selection for the plug-in, these side-chain inputs are shown as additional input channels in the Channel Routing window of the plug-in, with their names parenthesized: e.g. "(IN3)". These channels should be routed in the same way as ordinary channels are routed, including setting up required key signal sources assignments. Even though such way of setting up external side-chain does look somehow complicated, it offers a very deep control over side-chaining: for example, it allows you to perform mid-side encoding of the side-chain input before it is used for keying; another useful feature is that you can swap channels of the side-chain input effortlessly.

## In Channel Labels

---

By pressing this button you can open the channel label assignment popup window. You can give individual names to input channels in order to simplify a further channel routing setup understanding. Channel names you provide are also displayed on the user interface to inform you about channels that are currently being adjusted by the plug-in's controls.

You can also import channel labels from the host audio application by pressing the “Import labels from host” button. However, not all audio host applications provide distinctive input channel names: in that case entering your own names manually is the only existing option (Mac OS X AudioUnits do not provide input channel names).

## Group Names

---

This button opens the group name assignment popup window. You may assign names to channel groups for easiness of channel group selection.

## Routing Presets

---

The “Routing Presets” button opens a local preset list that covers settings present in the Channel Routing window, including channel labels. These presets are shared among Voxengo plug-ins of all types.

## Channel Group Selector

---

Almost every Voxengo plug-in features the channel group selector which allows you to select the channel group for which parameters are currently being edited or monitored.



This selector features a set of buttons that represent channel group names (indices, by default). Only groups actually assigned to the internal channels in the Channel Routing window are shown. You may use these buttons to switch between channel groups.

The “Solo” switch allows you to solo channels that belong to the currently selected group. This can be useful if you want to focus listening on group’s channels only. The state of the “Solo” switch is not saved between project sessions, and is not restored to its previously enabled state when the project is reloaded.

The “Copy to” button allows you to copy parameter settings defined for the current channel group, to another channel group. The “Reset” button resets parameters defined for the current group to the default values.

## Channel Group List

---

$(L+R)^A, IN3^C, IN4^D$

A Voxengo plug-in also presents a list of input channels being routed to a currently selected channel group. This list is interconnected with the Channel Routing window, and displays routing settings defined by it. This list contains names of input channels, comma delimited. Internal channel name (“A”, “B”, “C”, etc.) that accepts the corresponding input channel is displayed in a superscript style (these internal channel names are also displayed on the level meters). If more than one input channel is routed to the same internal channel, the sum is displayed in the form “(IN1+IN2)”. Additionally, when the internal channel is assigned to a mid/side group, its input channels are taken into parentheses with the “m” (mid) or “s” (side) prefix: “s(IN1 & IN2)” which means “side part of the mid/side pair consisting of IN1 and IN2 input channels”.



## Plug-In Settings for a Specific Plug-In

---

Voxengo plug-ins feature a set of settings that affect instances of the same plug-in only: they do not affect the same settings of other Voxengo plug-in types. This is convenient since this way you can select different color schemes for different plug-in types (for example, a Voxengo compressor may be colored in reds while a Voxengo equalizer may be colored in grays). The same applies to the user interface scale and the hints display switch: for example, if you have not still mastered a specific Voxengo plug-in you may leave the hints for this plug-in visible while you may disable the hints for a Voxengo plug-in you know well.

### Color Scheme

---

The color scheme selector consists of several small preview icons that show possible color scheme selections. You may press a desired icon to change the color scheme of all instances of the plug-in. Color scheme switches immediately in all open plug-in instances, and instances that will be opened later.

### User Interface Scale

---

By using this setting you may adjust the visual scale of the plug-in. For example, if your screen resolution is very high (1920 x 1200 or more) you may enable the largest scale (125%). On the other hand, if your screen resolution is low (1024 x 768) or you want to have many plug-in instances visible on the screen, having a smaller user interface size can be beneficial: in that case you may select the 80% scale. Note that the visual scale switch requires a full audio application restart.

### Hide Hints

---

This switch allows you to disable hint messages that appear on the bottom line. The hint state changes immediately in all open plug-in instances, and instances that will be opened later.

## Global Voxengo Plug-In Settings

---

Voxengo plug-ins also feature global settings that are shared among all Voxengo plug-in types. These settings mainly customize your interaction with various controls: mouse wheel precision, knob drag precision, etc.

### Auto Oversampling Level

---

This option selects oversampling level used by Voxengo plug-ins when the “Auto” oversampling option is selected. This option selects maximal oversampling level used. The actual used level may be lower depending on the working sample rate (the higher the working sample rate the lower the auto-selected oversampling is). Note that change takes effect only after the host audio application is fully reloaded.

### Mouse Wheel Precision

---

This setting affects a precision of the mouse wheel – the higher the precision the finer the control change that can be done with the mouse wheel.

### Shift Key Precision

---

This setting affects a control change precision when the Shift key modifier is pressed during dragging the control with the mouse.

### Drag Precision

---

This setting affects precision of mouse drag operations. This applies to knobs and readouts.

### Show Knob Labels

---

This switch allows you to enable or disable numeric labels that appear around the knob when you are hovering your mouse over it.

### Tablet Mode

---

This switch enables “tablet” mode allowing you to control Voxengo audio plug-ins with a pen tablet.

### Show Virtual Keyboard

---

When this switch is enabled, value entry will be accompanied with a popup window showing the “virtual keyboard” you can use instead of your real keyboard to enter various values (numeric and textual). Virtual keyboard is especially useful when the audio host application “blocks” certain keys from reaching plug-in’s user interface.

## VST Built-In Refresh

---

This switch enables VST specification's built-in user interface refreshing timer. This switch is available for VST plug-in format only. Enabling this switch will make all user interface refresh operations dependable on the audio host application. This may or may not be preferable, and depends on the overall behavior of the plug-in in a particular audio host application you are using. For example, if you have noticed some strange behavior of the plug-in's user interface during audio project bouncing you may try enabling this option.

## Plug-In Files' Locations

---

Any Voxengo plug-in is bundled in a separate archive file for every target platform. These archives contain document files, a license agreement, a change history log and a plug-in itself in the form of the dynamic link library (DLL) or the component file, for any given target computer platform. In order to be able to instantiate the plug-in in the host audio application you should put the DLL file into the correct file folder that corresponds to the “plug-ins path” specified in the audio application. It is suggested that you put the DLL file into the “Voxengo” subfolder within the plug-in folder, for easier searching from within the audio application.

While it is mandatory to read and agree to the supplied license agreement before using the plug-in, you may for your convenience put the DLL file separately from its accompanying files, including the license agreement file. However, as license agreement explicitly mentions, the DLL file cannot be re-distributed to other persons or companies/entities separately. You may store the DLL file separately from its accompanying files for your own archival and storage convenience purposes only.

During its operation, the plug-in also creates settings files where it stores global and per plug-in settings, including presets. On Windows systems the data files created by Voxengo audio plug-ins reside in the “\Documents and Settings\<UserName>\Application Data\Voxengo\Audio Plug-Ins\” folder; on Mac OS X systems the data files reside in the “/Users/<UserName>/Library/Preferences/Voxengo/Audio Plug-Ins/” folder. You may safely remove, copy and replace these files, including the “Voxengo\Audio Plug-Ins\” folder itself. All Voxengo plug-in settings and presets are available to the specific user of the computer only.

## **Additional Information**

---

### **Selecting Best Audio Block Size**

---

The most efficient audio card block size (latency) to work with this plug-in is 512 samples (plug-in's internal processing overhead may become considerable at low latencies such as 64 samples – the plug-in may require 45% more CPU time at such low latency).

### **64-Bit Audio Processing**

---

Plug-in conforms to the VST specification version 2.4, and so it is able to interface with audio host applications in full 64-bit floating point resolution (if supported by the host audio application).

AudioUnit version of plug-in is technically able to process 64-bit floating point audio data.

### **Plug-In Registration**

---

Commercial Voxengo plug-ins should be registered before you can use them in non-demo mode. Each commercial plug-in in its Settings window contains a special area where user registration details can be entered. Please use the standard copy&paste functions to ensure a correct product key entry (you may right-click the product key entry field to paste the key). User name is not required for entry. When details were entered correctly, you will see the “Registered to” text in the Settings window: in this case plug-in is working in a non-demo mode.

### **CPU Load Notice**

---

Before judging the plug-in's CPU load performance please make sure you understand that on multi-processor (multi-core) computers CPU load metering offered by the audio host application you are using can only be approximate. The reason for this is the fact that depending on the track configuration of your project, you may get a varying maximum number of plug-ins that can work at the same time. For example, if your project consists of only a single track with a long effects sequence, you may quickly run out of CPU resources while if you are putting these effects on parallel tracks, the maximum number of these effects you can use will double at the least.

Also pay attention to the “Oversampling” setting of the plug-in, because running a plug-in at 4x oversampling setting is the same thing as running 4 separate plug-ins at 1x oversampling.

## Questions and Answers

---

**Q.** Why some Voxengo plug-in controls appear dimmed after a new Voxengo plug-in instantiation or after loading a previously saved project?

**A.** This is a normal behavior since Voxengo plug-ins use dynamic internal processes allocation. When some controls appear dimmed it means that internal processes that correspond to these controls were not created still. Such behavior should not be seen as an erroneous one: these processes will be created when an audio playback is first started or when audio bouncing is initiated, and so the visual controls will also become active then.

**Q.** I may hear that when I switch from the 44.1 kHz working (project) sample rate to the 96 kHz sample rate the overall plug-in's sound changes a bit. Is this normal?

**A.** This is an expected plug-in behavior since the working sample rate may affect several internal signal processing aspects, especially digital filter shapes. Thus we are making an expressed disclaimer about the plug-in's sonic qualities when working at different sample rates: the plug-in may produce sonically different results working at different sample rates. However, these differences are usually minor any should not be construed as an invalid plug-in operation. It should be also noted that Voxengo plug-ins are designed to work at any sample rates equal or above 44.1 kHz: lower sample rates are not supported.

**Q.** Could you please tell me an easy way to setup mid/side processing over a stereo input?

**A.** To setup mid/side processing you will need to do the following: a) open the "Channel Routing" window; b) assign the mid/side pair "MS1" to channels "A" and "B"; c) assign channel "A" to group 1, channel "B" to group 2. After this has been done, the mid channel will be affected by settings defined in the group 1, and the side channel will be affected by settings defined in the group 2.

**Q.** How do I setup the mid/side processing?

**A.** This is done in the "Channel Routing" window. First of all, you should choose a pair of internal channels which you would like to process in mid/side mode. You should assign these channels to the same mid/side pair (e.g. "MS1"). Then you will need to assign these channels to separate channel groups as otherwise you won't be able to separately control the processing applied to both. For example, you may choose to assign the "mid" channel to group 1, and the "side" channel to group 2. After this has been done, you will be able to set the separate processing parameters for the "mid" channel by selecting group 1 for editing. The "side" parameters are accessible by selecting group 2 for editing. Alternatively, you may simply load the "Mid-Side Stereo" routing preset that will setup the necessary routing for you.

**Q.** I cannot get the GUI scale function to work. Tried closing and reopening the GUI but this didn't have any effect.

**A.** For the change to take effect when changing the user interface scale, you'll need to reload your audio application completely.

**Q.** I do not seem to find the “register” icon for the plug-in.

**A.** Please open plug-in's “Settings” window – you'll see the “Enter Key” button there.

**Q.** If I save a preset using host application's facilities – the name of the instance (which I can set in the text field of the plug-in) gets saved as well. So if I change presets the instance name gets overwritten.

**A.** Unfortunately, when you are using host application's own preset management this overwrites instance name when you load any previously saved preset. This cannot be resolved as otherwise instance name will not be saved with the project at all. You should use plug-in's internal preset manager if you want to keep instance name unchanged when loading a preset.

**Q.** If I click on the frequency, say “2K” and enter a “3” then it will jump to “20.00” and never come back.

**A.** Please make sure you are entering “3K” instead of just “3”, because entering “3” means “3 Hertz” – not “3 kilo Hertz”.

**Q.** It seems that the plug-in is taking some CPU resources even if I disable all of its stages (modules).

**A.** This is to be expected since even if plug-in processes nothing it still performs some routine tasks that are considered to be plug-in's processing overhead. Plug-in may also take additional CPU resources if its user interface is open since level meters (and spectrums) have to be updated even in the absence of the signal. Also the oversampling (quality) setting higher than “1x” alone makes plug-in take more CPU resources.

**Q.** Why the output signal metering of the plug-in looks inconsistent with the levels I see on my host audio application's level meters?

**A.** This can be caused by two reasons: 1) If you are using mid-side processing the output level you see is actually mid or side channel level, it is not a final output level. This could not be implemented in a different manner because if plug-in showed only the final output signal level you would not be able to see the signal level of the mid or side channel separately. 2) If you are using the oversampling setting different from the “1x”, the signal level you see is the output signal level before the final downsampling is performed. Since after downsampling new peak overshoots may appear you may see these peaks on the host's level meter while not on the plug-in's one. However, these overshoots usually have a low magnitude and should not cause any problems. If in doubt, please use a peak limiter on the master bus.

**Q.** I can only see one stereo out on the plug-in, that's not right, is it?

**A.** This means that your audio host application does not support VST 2.3 multi-channel operation, or you are inserting this plug-in to a mono or stereo track/bus. Many audio hosts still limit plug-in support to 2 channels input/output only, however this is not plug-in's limitation as it was successfully tested in hosts that support multi-channel operation.

**Q.** On multi processor systems are Voxengo plug-ins optimized to make use of more than one processor?

**A.** Voxengo plug-ins do not have special multi-processor optimizations, but they work fine if audio host application puts two or more instances on several cores/processors. This means that a single instance of a plug-in won't be spread over two cores/processors, but if you load two instances placed on different tracks/buses, they will be spread. This was tested in several hosts that support multi-processing, and the boost is around 70% in dual-core mode in comparison to single-core mode.

**Q.** It seems that plug-in's Routing window may display up to 16 input channels while there are only 8 internal channels inputs can be routed to. This looks like a limitation, is it so?

**A.** Indeed, plug-in may accept up to 16 input channels (8 normal inputs + 8 side-chain inputs) while it only possesses 8 internal channels. This means one cannot use full multi-channel external side-chain signal to process multi-channel input signal. Since side-chaining is usually used for mono and stereo signals only, this limitation should not cause much inconvenience in real situations, not to mention that dealing with multi-channel external side-chain signal can be mentally stressful.

**Q.** It would be nice if there was a quicker way to shuffle through the popup list options (in the Routing window, various mode and preset selectors).

**A.** You may hold the left mouse button on the selector, and then release the mouse button on the required popup list option. It is a one-click way of selection.

**Q.** It seems that gain reduction meter's scale is small – down to -9 dB only. Does it mean a particular Voxengo plug-in is not designed for higher compression values?

**A.** Since Voxengo plug-in's gain reduction meter shows gain reduction value relative to an average gain reduction in 2 second time frame, 3 to -9 dB scale is enough for most situations ranging from soft to heavy compression. In this sense, gain reduction meter shows instant compression ratio changes; that is why it can also display positive values showing moments when compression is relaxed after a period of a relatively high compressive action.

**Q.** Why gain reduction meter may show positive values?

**A.** The reason gain reduction meter may show positive values is due to the fact it shows gain reduction changes relative to 2-second average gain reduction, that is why it may fluctuate to positive values from time to time: this moments show when gain reduction becomes lower than the average gain reduction.



**Q.** I'm trying to set up side-chaining in Cubase 4 but I'm not sure if I doing it correctly. I have I track sending to the left input of a plug-in and another track sending to the right of a plug-in. I have setup this plug-in on a stereo group. I then go into plug-in's routing and Mute the B side-chain signal as I do not want to hear it but it does not seem to be effecting the compression.

**A.** In this scenario beside muting the "B side-chain signal" you also need to set key signal source for channel "A": it should be the "B" you have muted.

**Q.** I can't figure out how to setup side-chain in a Voxengo plug-in.

**A.** If you are sending stereo side-chain signal to a plug-in, in this plug-in you have to assign Input channels 3&4 to internal channels C&D. Then you need to assign Key Signal Sources for internal channels A&B: you should use C&D (C to A, D to B). Then you'll need to mute channels C&D, and you are done: channels A&B will be affected by signal in channels C&D (which represent side-chain inputs).

**Q.** When loading a Voxengo plug-in into my audio host application, and opening plug-in's Channel Routing window, I see a single input and a single output channel only while the plug-in is inserted into a multi-channel track. What should I do?

**A.** Usually you simply need to press the "Play" in your host audio application once so that this application reports an actual number of input and output channels to the plug-in.